




C1101 1.0/Male 1 Watt Termination 110 GHZ

Rev 000

| | |
|-----------------------|--|
| Electrical | |
| Frequency | 0-110 GHZ |
| VSWR | 1.60 Max |
| Impedance | 50 Ohms |
| Power Handling | 1 Watt Average @ 25°C Derated Linearly to 0.1 Watts @ 125°C |
| Mechanical | |
| 1.0 Interface per | IEC 61169-31 |
| Operating Temperature | -55°C to +125°C |
| Materials | |
| Body | Passivated Stainless Steel |
| Contacts | Brass |
| Contact Plating | Au 50µ" Min |
| ROHS Compliant | |



Outline

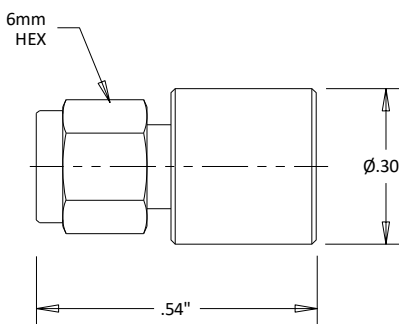

Dimensional Tolerances

| | |
|------|-------|
| .X | ±.030 |
| .XX | ±.010 |
| .XXX | ±.005 |