




C1101F 1.0/Female 1 Watt Termination 110 GHZ

Rev 000

Electrical	
Frequency	0-110 GHZ
VSWR	1.60 Max
Impedance	50 Ohms
Power Handling	1 Watt Average @ 25°C Derated Linearly to 0.1 Watts @ 125°C
Mechanical	
1.0 Interface per	IEC 61169-31
Operating Temperature	-55°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	Brass
Contact Plating	Au 50μ" Min
ROHS Compliant	



Outline

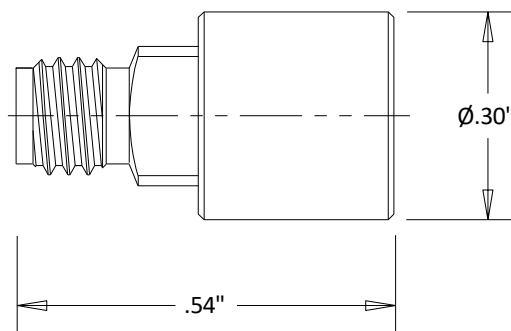

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005