




C18MG-27 MiniSMP/Female Termination 27 GHz

Rev 000

Electrical	
Frequency	0-27 GHz
VSWR	1.30
Impedance	50 Ohms
Power Handling	0.5 Watts
Mechanical	
MiniSMP Interface per	MIL-STD-348B
Operating Temperature	-45°C to +125°C
Materials	
Body	Gold plated BeCu
Contact	BeCu
Contact Plating	Au per MIL-G-45204
Dielectric	PTFE
ROHS Compliant	



Outline

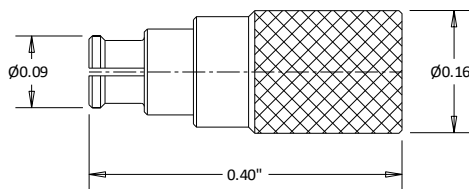

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

