




C18SS SSMA/Male Termination 18 GHZ

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.25
Impedance	50 Ohms
Mechanical	
SSMA Interface per	MIL-STD-348B
Operating Temperature	-45°C to +120°C
Materials	
Body	Passivated Stainless Steel
Contact	Brass
Contact Plating	Au per MIL-G-45204
Dielectric	PTFE
End Cap	Gold plated Brass
ROHS Compliant	



Outline

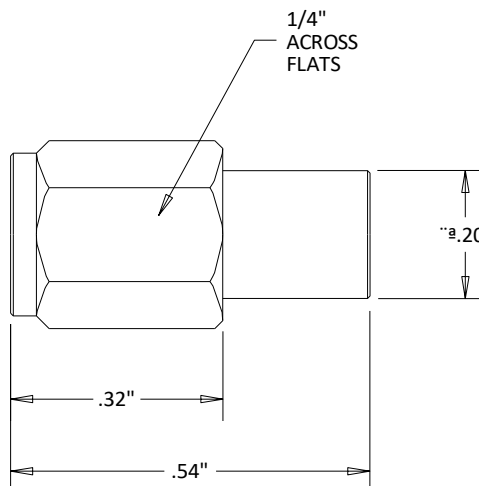

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005