




C2247 BNC/Female to SMA/Female Flange Adapter 4 GHZ

Rev 000

Electrical	
Frequency	0-4 GHz
VSWR	1.20 Max
Impedance	50 Ohms
Mechanical	
BNC & SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Body(BNC)	Nickel Plated Brass
Body(SMA)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 30μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

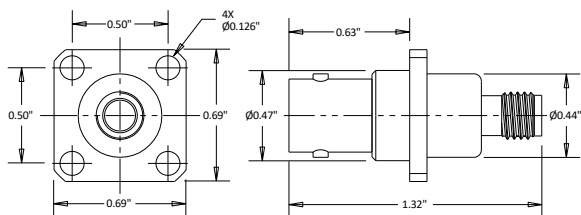

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

