




C2510 TNC/Female to TNC/Female Bulkhead Adapter 18 GHZ

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.20 Max
Impedance	50 Ohms
Mechanical	
TNC Interface per	MIL-STD-348B
Operating Temperature	-55°C to +120°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

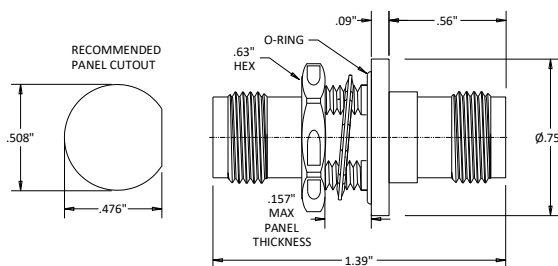

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

