




C2523 TNC/Female to TNC/Female Bulkhead Adapter 18 GHZ

Rev 001

| | |
|-----------------------|----------------------------|
| Electrical | |
| Frequency | 0-18 GHZ |
| VSWR | 1.15 Max |
| Impedance | 50 Ohms |
| Mechanical | |
| TNC & Interface per | MIL-STD-348B |
| Operating Temperature | -45°C to +125°C |
| Materials | |
| Body | Passivated Stainless Steel |
| Contacts | BeCu |
| Contact Plating | Au 50μ" Min |
| Dielectric | PTFE |
| ROHS Compliant | |



Outline

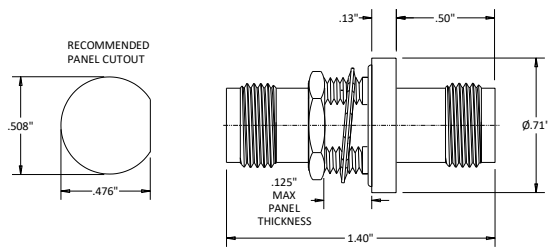

Dimensional Tolerances

| | |
|------|-------|
| .X | ±.030 |
| .XX | ±.010 |
| .XXX | ±.005 |

Typical Data

