




C2774 2.92/Female to SSMA/Male Adapter 40 GHZ

Rev 000

Electrical	
Frequency	0-40 GHZ
VSWR	1.20 Max
Impedance	50 Ohms
Mechanical	
2.92 & SSMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50μ" Min
Dielectric	PTFE(SSMA), PEI(2.92)
ROHS Compliant	



Outline

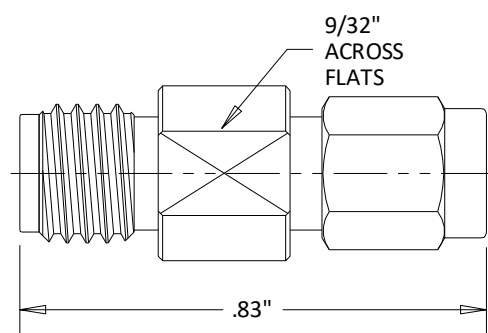

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

