




C27SC SMA/Male Termination 27 GHZ with Chain

Rev 000

Electrical	
Frequency	0-27 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
Power Handling	1 Watt Average
Power Handling(Peak)	200 W(50μsec pulse width 1% duty cycle)
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-45°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	Brass
Contact Plating	Au 30μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

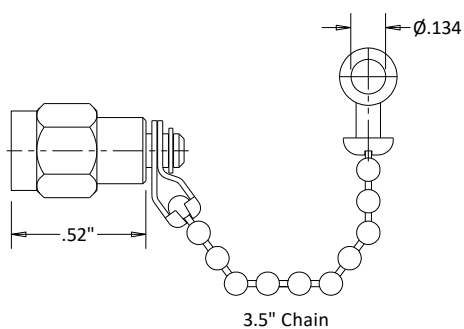

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

