




C2F F/Male Termination 2 GHZ

Rev 000

Electrical	
Frequency	0-2 GHZ
VSWR	1.20 Max
Impedance	75 Ohms
Mechanical	
Operating Temperature	-55°C to +165°C
Materials	
Body	Tri-Alloy Plated Brass
Contacts	Phosphor Bronze
Contact Plating	SucoPRO
Dielectric	PTFE
ROHS Compliant	



Outline

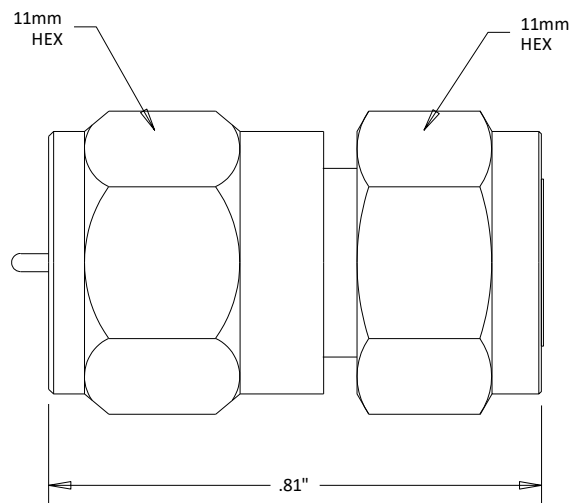

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005