C3367 SMA/Female to SMA/Female Adapter 18 GHZ

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.20 Max @ 18 GHZ
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-40°C to +120°C
Materials	
Body	Au Plated Stainless Steel
Contacts	BeCu
Contact Plating	Au Per MIL-G-45204
Dielectric	PTFE per ASTM-D-1710
ROHS Compliant	

Outline

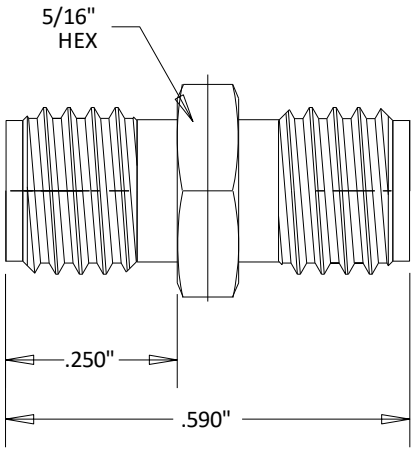

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

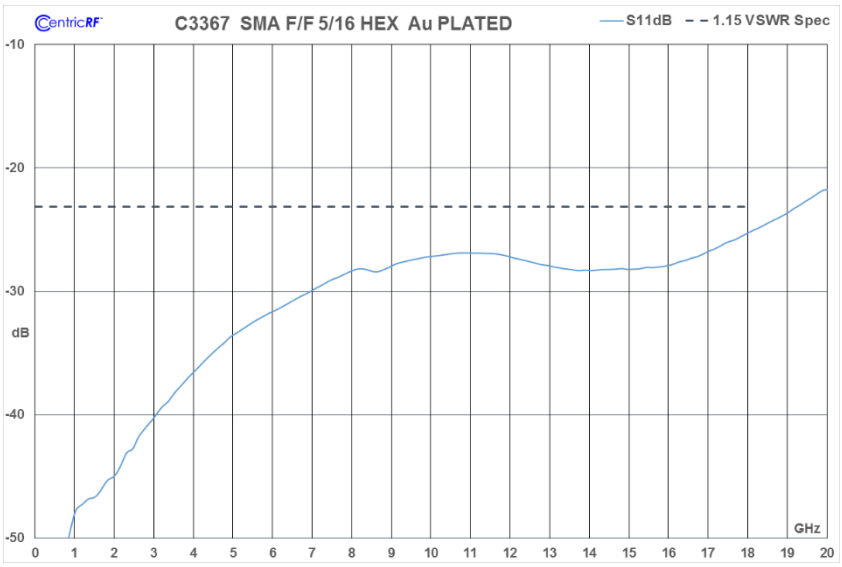

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com