
C3372 SMA/Female to SMA/Female 18 GHZ Adapter with Knurl

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.15
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-45°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50µ" Min
Dielectric	PTFE
ROHS Compliant	




Outline

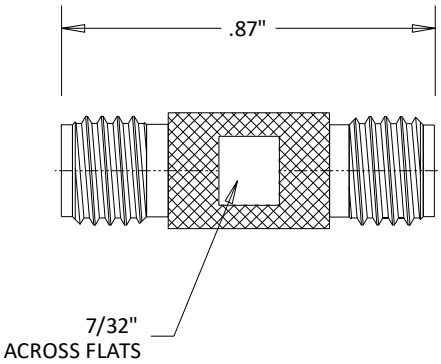

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

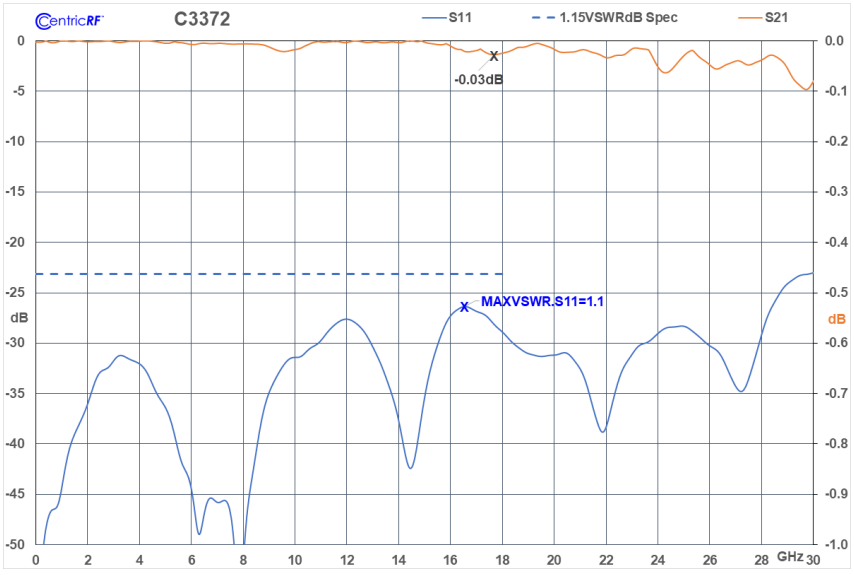

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com