C3612 N/Female to SMA/Female Bulkhead Adapter 11 GHZ

Rev 000

Electrical	
Frequency	0-11 GHZ
VSWR	1.20
Impedance	50 Ohms
Mechanical	
N & SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +100°C
Materials	
Body(N)	Nickel Plated Brass
Body(SMA)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au per MIL-G-45204
Dielectric	PTFE
ROHS Compliant	

Outline

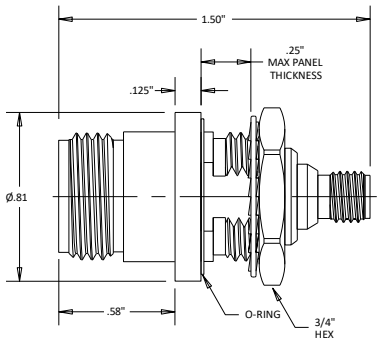



Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

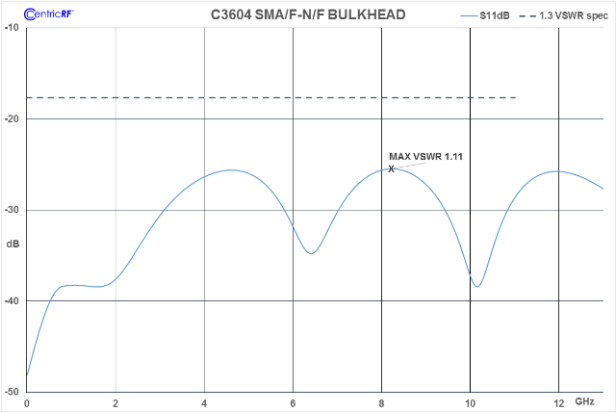

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com