




C3693 N/Male to SMA/Female Flange Adapter 11 GHZ

Rev 000

Electrical	
Frequency	0-11 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
Mechanical	
N & SMA Interface per	MIL-STD-348B
Operating Temperature	-45°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu(Female); Brass(Male)
Contact Plating	Au 30μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

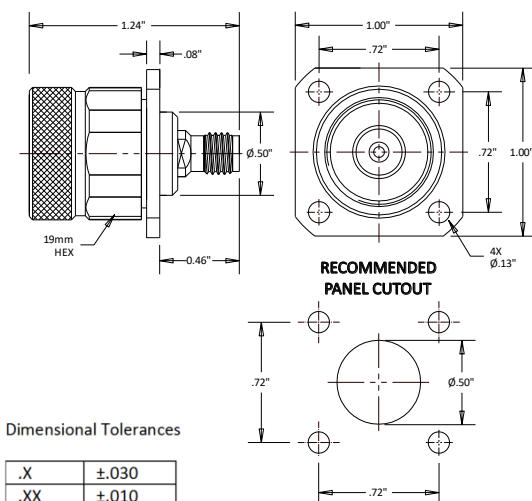

Typical Data

