




C401C 2.92/Male 2 Watt Termination with Chain 40 GHZ

Rev 001

Electrical	
Frequency	0-40 GHZ
VSWR	1.20 Max
Impedance	50 Ohms
Mechanical	
2.92 Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	Brass
Contact Plating	Au 50μ"
ROHS Compliant	



Power Handling(Avg)	2 Watt @ 25°C; derated linearly to 0.5 @ 125°C
Power Handling(Peak)	125 Watts(5μsec pulse width; 1% duty cycle)

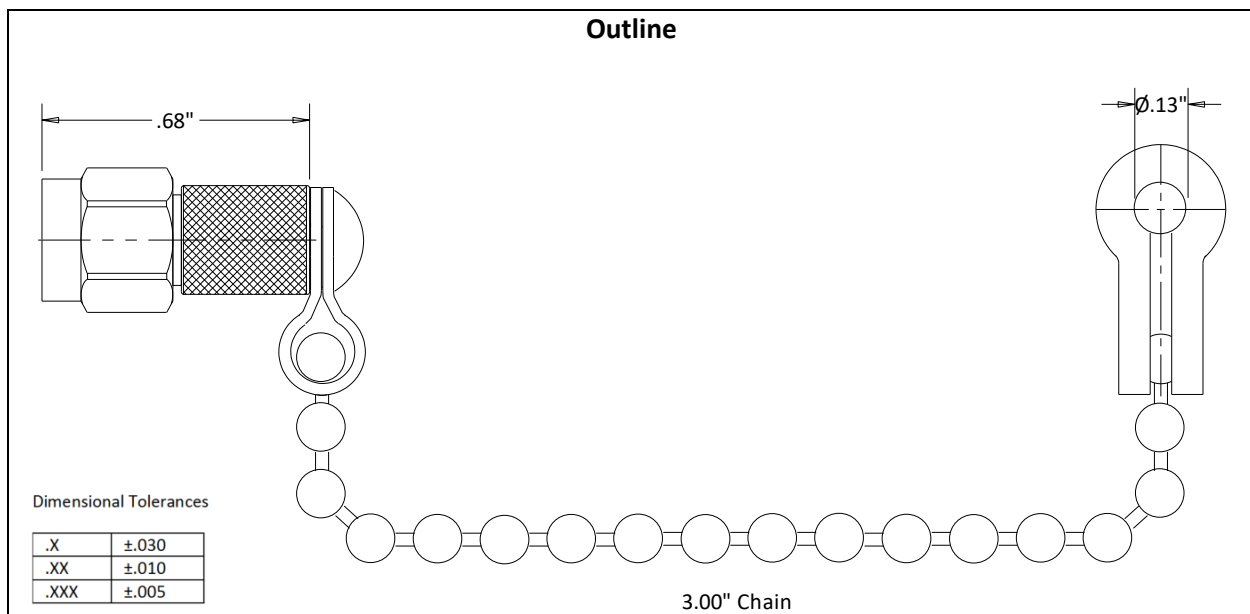

1130 Junction Dr. Suite 100 Allen, TX 75013 800-399-6891 www.CentricRF.com