




C402G SMP/Female Termination 40 GHZ

Rev 000

Electrical	
Frequency	0-40 GHZ
VSWR	1.20
Impedance	50 Ohms
Power Handling	2 Watt
Mechanical	
SMP Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Body	Gold plated BeCu
Contact	BeCu
Contact Plating	Au 50μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

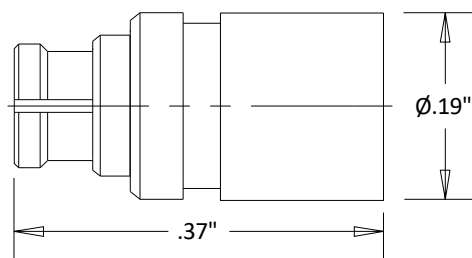

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

