




C4105 SMP/Female to SMP/Female Bullet Adapter 27 GHZ

Rev 000

Electrical	
Frequency	0-27 GHZ
VSWR	1.20 to 27 GHZ
Impedance	50 Ohms
Mechanical	
SMP Interface per	MIL-STD-348B
Materials	
Body	BeCu
Contact Plating	Au 50μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

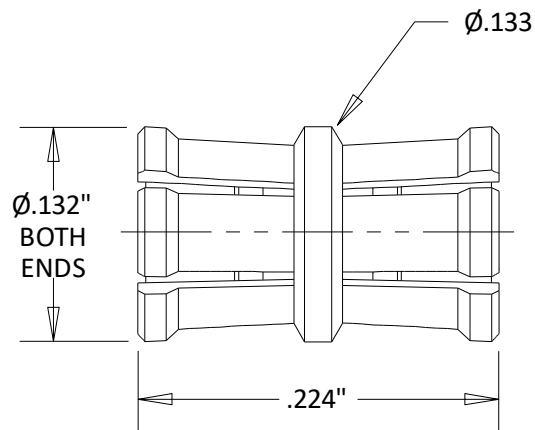

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005