




C4221 2.92/Female to SMPS/Female Adapter 40 GHZ

Rev 000

Electrical	
Frequency	0-40 GHZ
VSWR	1.20
Impedance	50 Ohms
Mechanical	
2.92 & SMPS Interface per	MIL-STD-348B
Materials	
Body(2.92)	Au plated Stainless Steel
Body(SMPS)	Au plated BeCu
Contacts	BeCu
Contact Plating	Au 50μ" Min
ROHS Compliant	



Outline

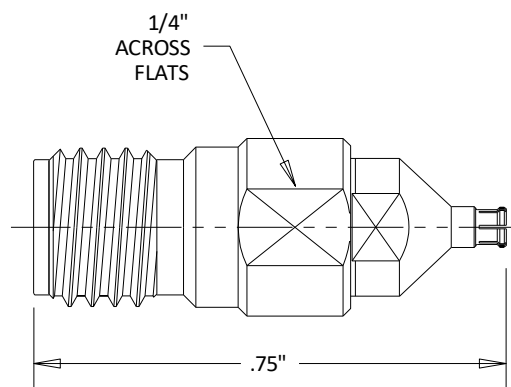

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

