




C4253 2.92/Female to SMP/Male Full Detent Adapter 40 GHZ

Rev 001

Electrical	
Frequency	0-40 GHZ
VSWR	1.25 to 40 GHZ
Impedance	50 Ohms
Mechanical	
2.92 & SMP Interface per	MIL-STD-348
Materials	
Connectors(2.92)	Au plated Stainless Steel
Connectors(SMP)	BeCu
Female Contacts	BeCu per ASTM-B-196
Contact Plating	Au Per MIL-G-45204
ROHS Compliant	



Outline

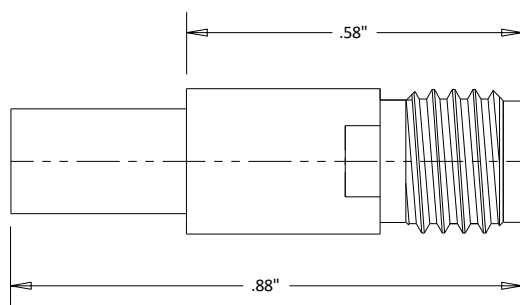

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

