




C4258 2.92/Male to SMP/Male Full Detent Adapter 40 GHZ

Rev 000

Electrical	
Frequency	0-40 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
Mechanical	
2.92 & SMP Interface per	MIL-STD-348B
Operating Temperature	-45°C to +125°C
Materials	
Body(2.92)	Passivated Stainless Steel
Body(SMP)	Au plated Stainless Steel
Contact Plating	Au 50μ" Min
Contact	BeCu
Dielectric	PTFE(SMP), ULTEM(2.92)
ROHS Compliant	



Outline

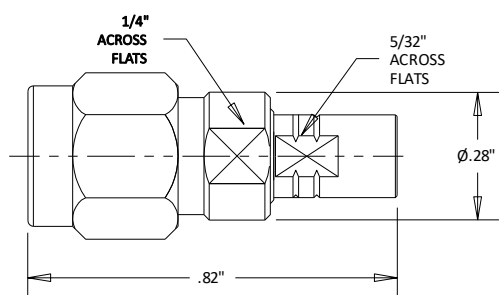

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

