




C4384 2.4/Female to MiniSMP/Male Full Detent Adapter 50 GHZ

Rev 000

Electrical	
Frequency	0-50 GHZ
VSWR	1.30 Max
Impedance	50 Ohms
Mechanical	
2.4 & MiniSMP Interface per	MIL-STD-348
Materials	
Body(2.4)	Passivated Stainless Steel
Body(MiniSMP)	Gold plated Stainless Steel
Plating	Au 50 μ " Min
Dielectric	Ultem-1000(2.4), PTFE(MiniSMP)
ROHS Compliant	



Outline

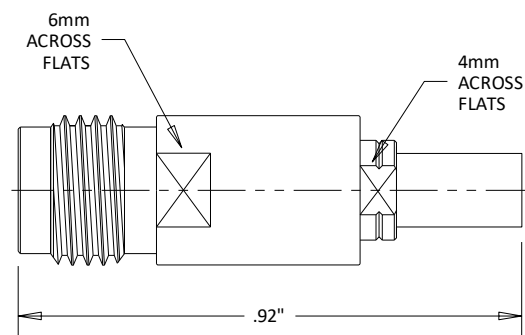

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

