




## C4416 2.2/5-Female to 2.2/5-Female Flange Adapter 6 GHZ

Rev 000

<b>Electrical</b>	
Frequency	0-6 GHZ
VSWR	1.20 Max
Impedance	50 Ohms
PIM(3 <sup>rd</sup> )	-160 dBc Max with 2 CW Tones @ 43 dBm
<b>Mechanical</b>	
4.3/10 Interface Per	IEC 61169-66
Operating Temperature	-45°C to +125°C
<b>Materials</b>	
Body	Tri-Alloy plated Brass
Contacts	BeCu
Contact Plating	Silver
Dielectric	PTFE
ROHS Compliant	



### Outline

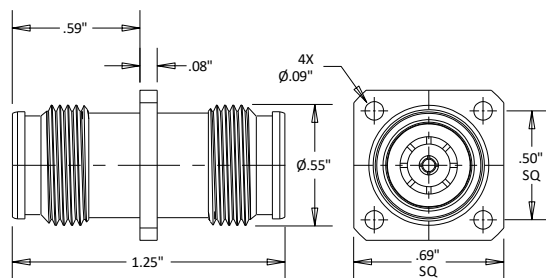

#### Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

### Typical Data

