




C4833 2.92/Female Coaxial Short 40 GHZ

Rev 001

Electrical	
Frequency	0-40 GHZ
Mechanical	
2.92 Interface per	MIL-STD-348B
Operating Temperature	-65°C to +165°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu per ASTM-B-196
Contact Plating	Au Per MIL-G-45204
Dielectric	PTFE per ASTM-D-1710
ROHS Compliant	



Outline

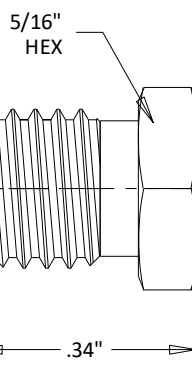

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005