




C4866 SMB/Jack Short

Rev 000

Electrical	
Impedance	50 Ohms
Mechanical	
SMB Interface Per	IEC 60169-10
Operating Temperature	-55°C to +125°C
Materials	
Body	Gold plated Brass
Contacts	Tin Bronze
Contact Plating	Au 3μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

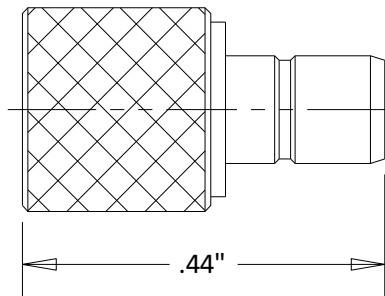

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005