




C4953 HN/Female to HN/Female Bulkhead Adapter 4 GHZ

Rev 000

Electrical	
Frequency	0-4 GHZ
VSWR	1.20 Max
Impedance	50 Ohms
Mechanical	
HN Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Body	Nickel plated Brass
Contacts	BeCu
Contact Plating	Au per MIL-G-45204
Dielectric	PTFE
ROHS Compliant	



Outline

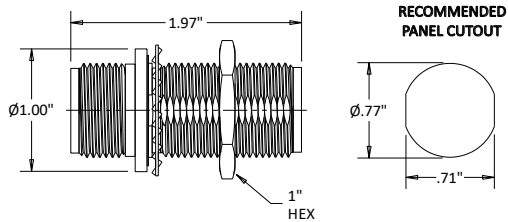

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

