




## C5594 N/Male(50 Ohm) to N/Female(75 Ohm) Adapter 4 GHZ

Rev 000

<b>Electrical</b>	
Frequency	0-4 GHZ
<b>Mechanical</b>	
N Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
<b>Materials</b>	
Body	Nickel Plated Brass
Contacts(Male)	Brass
Contacts(Female)	BeCu
Contact Plating	Au 50μ" Min
ROHS Compliant	



### Outline

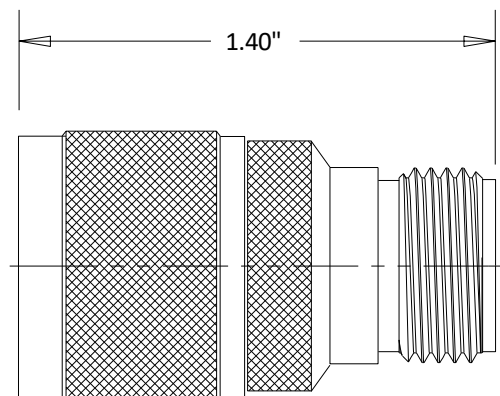

#### Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005