




C5621 N/Female to N/Female Bulkhead Adapter 11 GHZ

Rev 001

Electrical	
Frequency	0-11 GHZ
VSWR	1.35
Impedance	50 Ohms
Mechanical	
N Interface per	MIL-STD-348B
Operating Temperature	-55°C to +100°C
Materials	
Body	Nickel Plated Bras
Contacts	BeCu
Contact Plating	Au 30μ" Min
Dielectric	PTFE
ROHS Compliant	



Outline

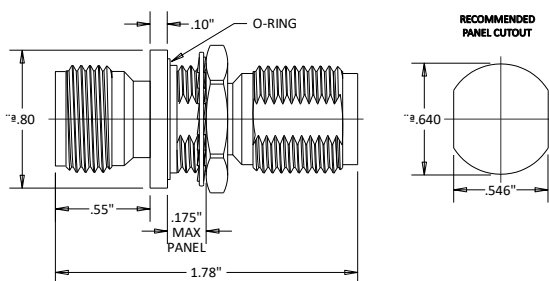

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

