




C569-250-XXB 4.3/10 Male to 4.3/10 Male Low PIM Corrugated Cable Assembly 3 GHZ

Rev 000

Electrical	
Frequency	0-3 GHz
VSWR	1.20 Max
Impedance	50 Ohms
PIM	165 dBc Min @ 1800 Mhz
Mechanical	
4.3/10 Interface per	IEC 61169-54
Overall Jacket Diameter	.30"
Materials	
Connector Body	Tri-Metal Plated Brass
Contacts	Brass
Contact Plating	Silver
ROHS Compliant	



IP68 Rated(Mated Condition)

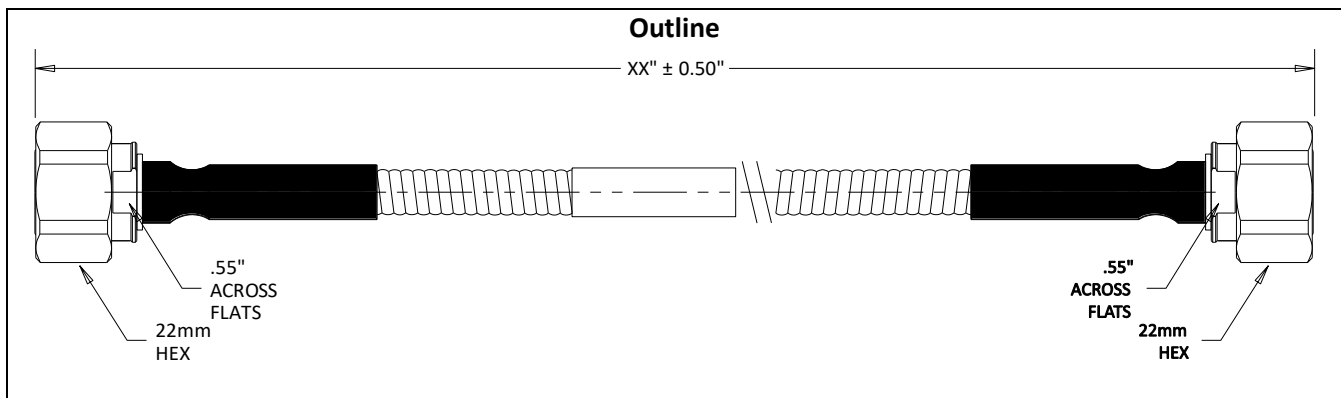

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com