




## C570-141-XX N/Male to N/Male Super Flexible Cable Assembly 18 GHZ

Rev 001

<b>Electrical</b>	
Frequency	0-18 GHZ
VSWR	1.30
Impedance	50 Ohms
<b>Mechanical</b>	
N Interface per	MIL-STD-348B
Operating Temperature	-40°C to +85°C
<b>Materials</b>	
Connector Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50µ" Min
ROHS Compliant	

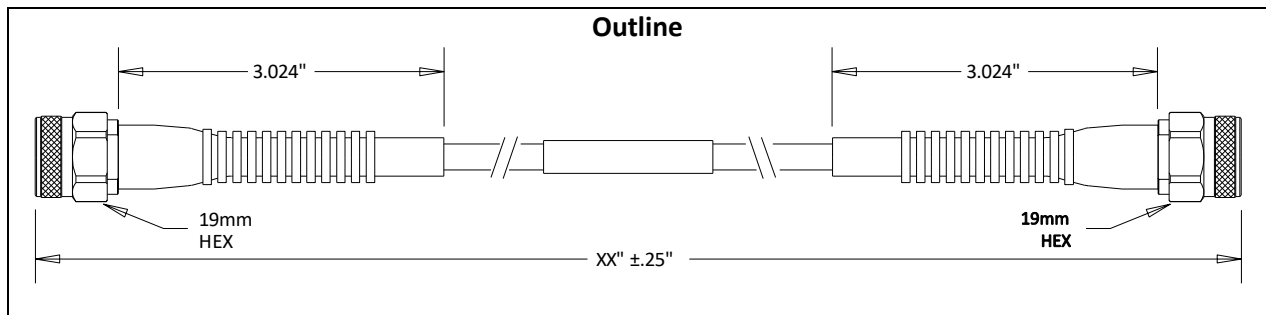

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 [www.CentricRF.com](http://www.CentricRF.com)