




C574-086 SMA/Male to SMP/Female Right Angle Cable Assembly 18 GHZ

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.35 Typical
Impedance	50 Ohms
Mechanical	
SMA & SMP Interface per	MIL-STD-348B
Operating Temperature	-40°C to +120°C
Materials	
Raw Cable	RG-405
Outer Shield Diameter	.086"
Overall Diameter	.110"
SMA Connector Body	Passivated Stainless Steel
SMP Connector Body	Au Plated Stainless Steel
SMA Contacts	Au Plated Brass
SMP Contacts	Au Plated BeCu
Contact Plating	Au Per MIL-G-45204
ROHS Compliant	



Outline

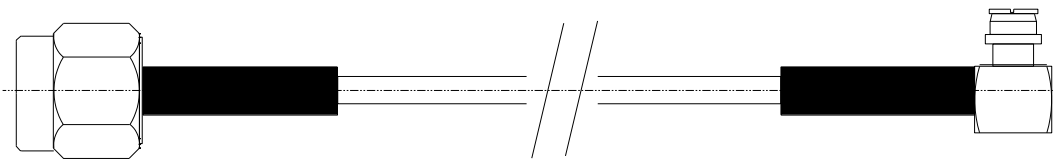

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005