




C5757-241-XX BNC Male to Male CRF240 Ultra Flexible Custom Cable Assembly 02 GHz

Rev 000

Electrical	
Frequency	0 - 2 GHz
VSWR	1.30 Max
Impedance	50 Ohms
Mechanical	
BNC Interface per	MIL-STD-348B
Materials	
Raw Cable	LMR240 Ultraflex Equivalent
Outer Shield Diameter	.178"
Overall Diameter	.240"
BNC Body	Nickel Plated Brass
BNC Contacts	Brass
Contact Plating	Au 30μ" Min



Outline

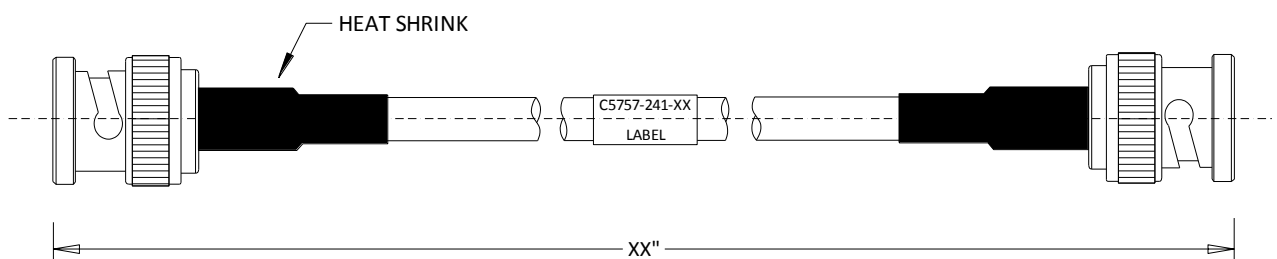

Imperial English		Metric	
<= 1 foot	+1 inch - 0 inches	<= 0.3 meter	+25 mm -0 mm
> 1 foot – 5 feet	+ 2 inches - 0 inches	> 0.3 meters – 1.5 meters	+ 50 mm - 0 mm
> 5 feet – 10 feet	+ 4 inches - 0 inches	> 1.5 meters – 3 meters	+ 100 mm - 0 mm
> 10 feet – 25 feet	+ 6 inches - 0 inches	> 3 meters – 7.5 meters	+ 150 mm - 0 mm
> 25 feet	+5% - 0%	> 7.5 meters	+5% - 0%