




C581-141 SMA/Male to SMA/Male Cable Assembly 18 GHZ

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.20 Max to 18 GHZ
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Raw Cable	RG-402
Outer Shield Diameter	.141"
Overall Diameter	.165"
SMA Connector Body	Passivated Stainless Steel
Contacts	Brass
Contact Plating	Au Per MIL-G-45204



Outline

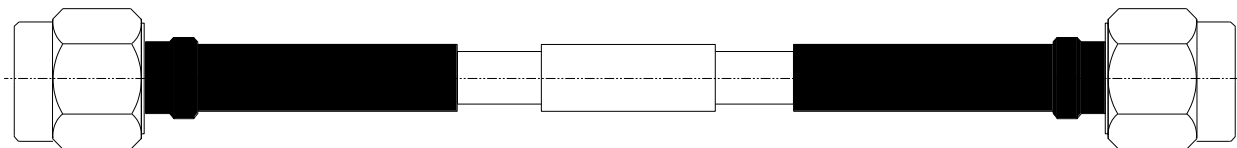

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005