




C585-141 SMA/Male to SMA/Male Formable .141 Cable Assembly 18 GHZ

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.25 Max to 18 GHZ
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +105°C
Materials	
Raw Cable	.141 Formable with FEP Jacket
Outer Shield Diameter	.141"
Overall Diameter	.163"
SMA Connector Body	Passivated Stainless Steel
Anti-Lock Torque Nut	Au Plated Stainless Steel
Contacts	Brass
Contact Plating	Au Per MIL-G-45204



Outline

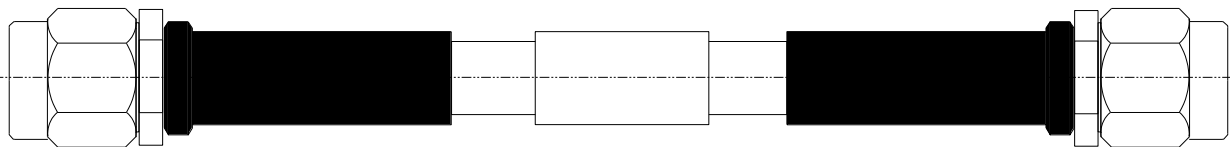

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005