




C586-141-XX SMA/Male Right Angle to SMA/Male/Right Angle .141 Cable Assembly 18 GHZ

Rev 000

Electrical	
Frequency	0-18 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-55°C to +105°C
Materials	
Outer Shield Diameter	.141"
Overall Diameter	.163"
SMA Connector Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50µ" Min
ROHS Compliant	



Outline

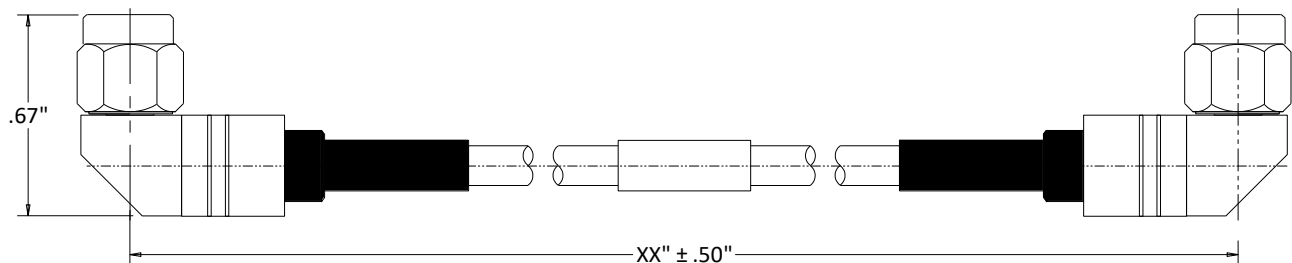

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005