




C593-141-XX SMA/Male to SMA/Male Test Flexible .141 Cable Assembly 27 GHz

Rev 000

Electrical	
Frequency	0-27 GHz
VSWR	1.30 Max
Impedance	50 Ohms
Mechanical	
SMA Interface per	MIL-STD-348B
Materials	
Outer Shield Diameter	.141"
Overall Diameter	.163"
SMA Connector Body	Passivated Stainless Steel
Contacts	Brass
Contact Plating	Au 50 μ " Min
ROHS Compliant	



Outline

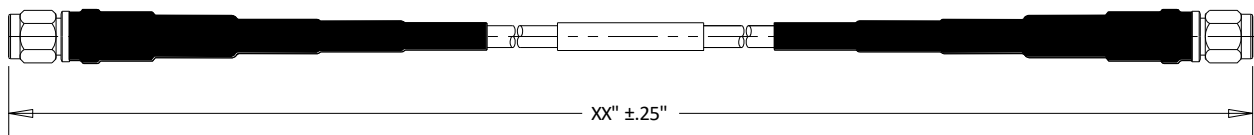

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com