




C7064B 2.92/Female to 2.92/Female Flange Adapter 43.5 GHZ

Rev 000

Electrical	
Frequency	0-43.5 GHZ
VSWR	1.20 @ 40 GHZ 1.25 Max @ 43.5
Impedance	50 Ohms
Mechanical	
2.92 Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125C
Materials	
Connectors	Passivated Stainless Steel
Female Contacts	BeCu
Contact Plating	Au 50μ" Min
ROHS Compliant	



Outline

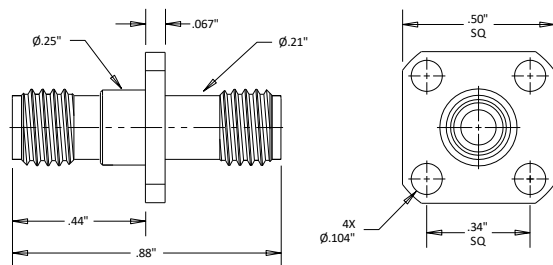

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

