




C7605 2.4/Female to SMA/Female Adapter 27 GHZ

Rev 000

| | |
|-------------------------|----------------------------|
| Electrical | |
| Frequency | 0-27 GHZ |
| VSWR | 1.15 Max |
| Impedance | 50 Ohms |
| Mechanical | |
| 2.4 & SMA Interface per | MIL-STD-348B |
| Operating Temperature | -55°C to +125°C |
| Materials | |
| Body | Passivated Stainless Steel |
| Contacts | BeCu |
| Contact Plating | Au 50μ" Min |
| Dielectric | PTFE(SMA); PEI(2.4) |
| ROHS Compliant | |



Outline

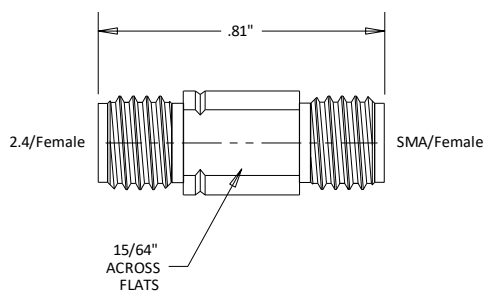

Dimensional Tolerances

| | |
|------|-------|
| .X | ±.030 |
| .XX | ±.010 |
| .XXX | ±.005 |

Typical Data

