




C7847 2.4/Male to 3.5/Female Adapter 33 GHz

Rev 000

Electrical	
Frequency	0-33 GHz
VSWR	1.15 Max
Impedance	50 Ohms
Mechanical	
2.4 Interface per	IEEE STD 287
3.5 Interface per	IEC 60169-23
Operating Temperature	-55°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50μ" Min
ROHS Compliant	



Outline

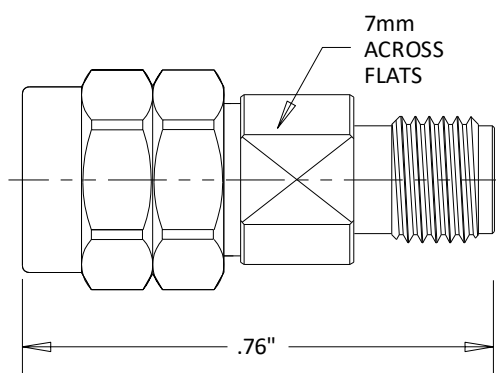

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

