




C8071B 1.85/Female to 1.85/Female Bulkhead Hermetic Adapter 67 GHZ

Rev 000

Electrical	
Frequency	0-67 GHZ
VSWR	1.40 Max
Impedance	50 Ohms
Mechanical	
1.85 Interface per	IEEE P287
Operating Temperature	-30°C to +165°C
Materials	
Body(1.85)	Passivated Stainless Steel
Body	Au 5μ" over Nickel Plated S Steel
Contacts	BeCu
Contact Plating	SucoPRO
Gasket	Viton
ROHS Compliant	



Leak rate not to exceed: 1×10^{-8} cc/sec of helium at 1 ATM

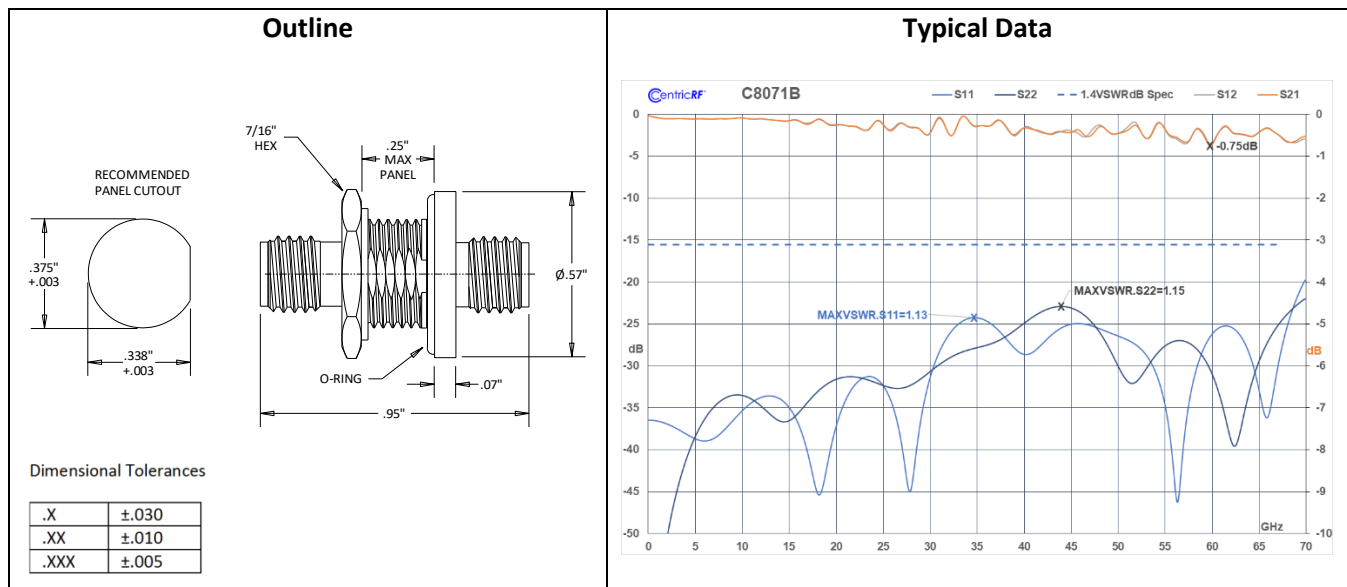

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com