




C8198 1.85/Male to 2.92/Male Adapter 43.5 GHz

Rev 000

Electrical	
Frequency	0-43.5 GHz
VSWR	1.15 Max at 40 GHz; 1.2 at 43.5 GHz
Impedance	50 Ohms
Mechanical	
1.85 Interface per	IEEE STD P287
2.92 Interface per	MIL-STD-348B
Operating Temperature	-55°C to +125°C
Materials	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50μ" Min
ROHS Compliant	



Outline

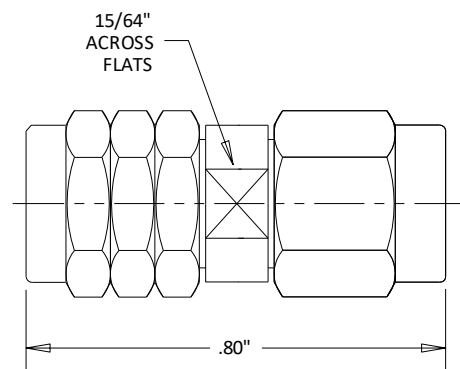

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

