
C8478 7/16-Female to SMA/Female Adapter 6 GHZ

Rev 000

Electrical	
Frequency	0-6 GHZ
VSWR	1.25 Max
Impedance	50 Ohms
PIM(3rd)	-165 dBc Max with 2 CW Tones @ 43 dBm
Mechanical	
7/16 Interface Per	IEC 61169-4
SMA Interface per	MIL-STD-348B
Operating Temperature	-45°C to +120°C
Materials	
Body	Trialloy plated Brass
Contacts	BeCu
Contact Plating	Silver
Dielectric	PTFE
ROHS Compliant	




Outline

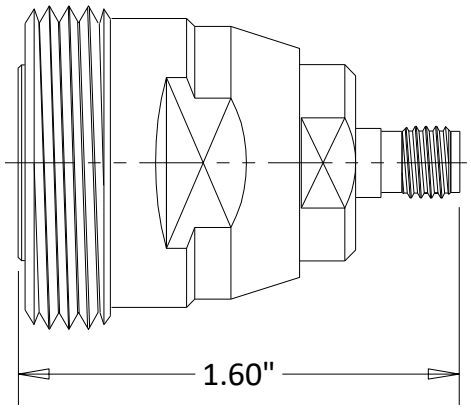

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

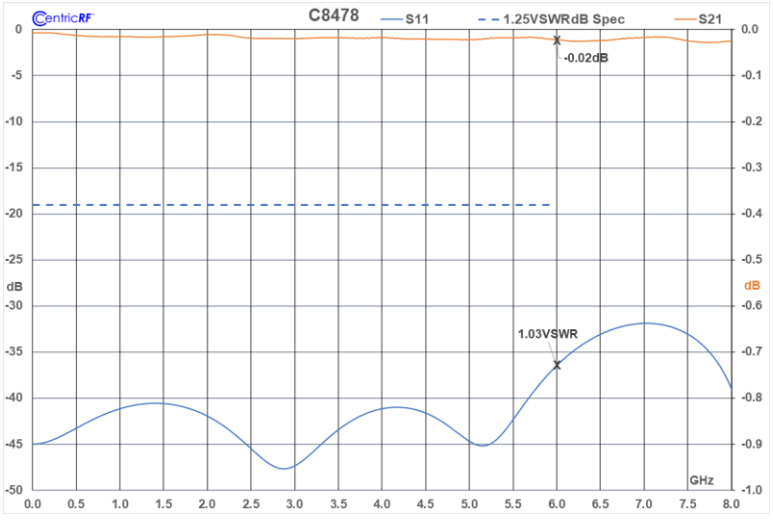

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com