



## C8T50 TNC/Male 50 Watt Termination 8 GHZ


Rev 000

<b>Electrical</b>	
Frequency	0-8 GHZ
VSWR	1.30 Max
Impedance	50 Ohms
Power Handling(Average)	50 Watts @ 25°C De-rated Linearly to 2.5 Watt @ 125°C
<b>Mechanical</b>	
Operating Temperature	-55°C to +125°C
<b>Materials</b>	
Body	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au per MIL-G-45204
Dielectric	PTFE
ROHS Compliant	




### Outline

### Typical Data

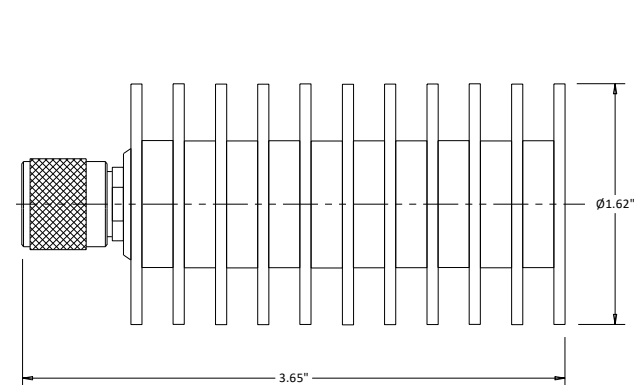

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

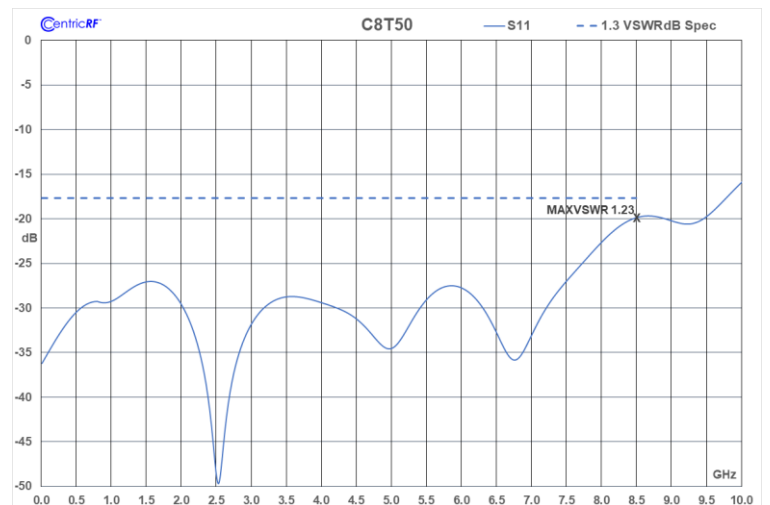

1130 Junction Dr. Suite 100 Allen, TX 75013 800-399-6891 [www.CentricRF.com](http://www.CentricRF.com)