




## C9406 10-32(Microdot)/Female to Female Adapter 2 GHZ

Rev 000

<b>Electrical</b>	
Frequency	0-2 GHZ
VSWR	1.25
Impedance	50 Ohms
<b>Materials</b>	
Body	Nickel Plated Brass
Contacts	BeCu
Contact Plating	Au Per MIL-G-45204
Dielectric	PTFE per ASTM-D-1710
ROHS Compliant	



### Outline

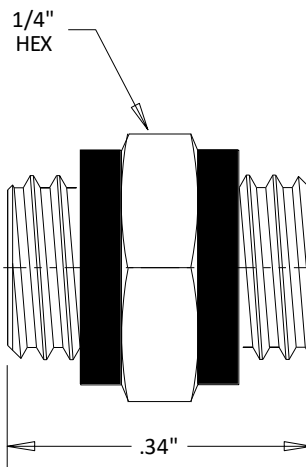

#### Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005