




C9415 10-32(Microdot)/Male to 10-32(Microdot)/Female Right Angle Adapter

Rev 002

Electrical	
Frequency	0-2 GHz
VSWR	1.25
Impedance	50 Ohms
Mechanical	
Operating Temperature	-65°C to +165°C
Materials	
Body	Nickel Plated Brass
Contacts	BeCu
Contact Plating	Au Per MIL-G-45204
Dielectric	PTFE per ASTM-D-1710
ROHS Compliant	



Outline

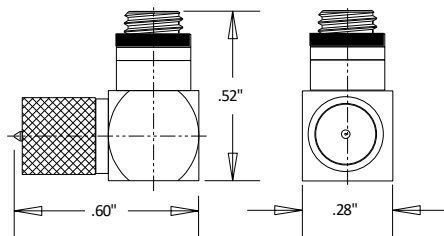

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

