

CentricRF™


CF1827 SMA/Female Circulator 18.0 – 27.0 GHZ

Rev 000

Electrical	
Frequency	18.0 – 27.0 GHZ
VSWR	1.40
Impedance	50 Ohms
Isolation	17 dB Min
Insertion Loss	0.6 dB
Power Handling	10 Watts
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	25°C
Materials	
Body(SMA)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50μ" Min
Dielectric	PTFE



Outline

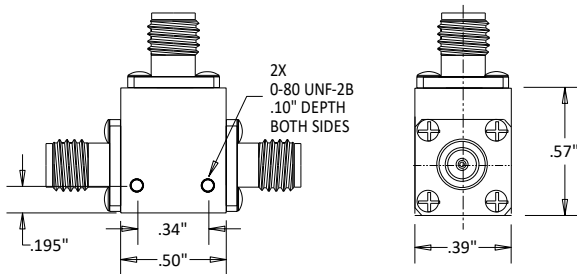

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

