

CentricRF™


CF4080 SMA/Female Circulator 4.0 – 8.0 GHZ

Rev 001

Electrical	
Frequency	4.0 – 8.0 GHZ
VSWR	1.35
Impedance	50 Ohms
Isolation	17 dB Min
Insertion Loss	0.5 dB
Power Handling	50 Watts
Transmission	Counterclockwise
Mechanical	
SMA Interface per	MIL-STD-348B
Operating Temperature	-40°C to +70°C
Materials	
Body(SMA)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50μ" Min
Dielectric	PTFE



Outline

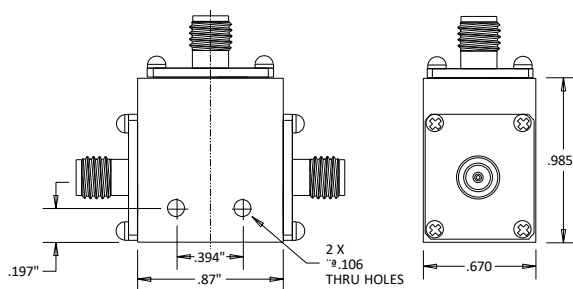

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

Typical Data

