




CI0822 SMA/Female Isolator 8 - 22 GHZ

Rev 000

Electrical	
Frequency	8 - 22 GHZ
VSWR	1.60
Impedance	50 Ohms
Isolation	12 dB Min
Insertion Loss	1.5 dB
Power Handling	10 Watts Forward / 1 Watts Reverse
Mechanical	
SMA Interface per	MIL-STD-348B
Materials	
Body(SMA)	Au Plated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50 μ " Min
Dielectric	PTFE



Outline

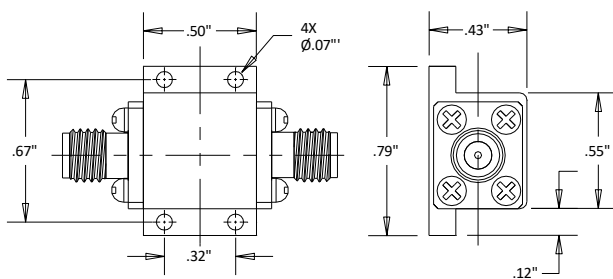

Dimensional Tolerances

.X	$\pm .030$
.XX	$\pm .010$
.XXX	$\pm .005$

Typical Data

