




CR27N-50B N/Female 50 dB 1 dB Steps Dual Rotary Attenuator 2.7 Ghz

Rev 000

Electrical	
Frequency	0-2.7 Ghz
VSWR	1.45 Max
Impedance	50 Ohms
Average Power	2 Watts
Insertion Loss	1.0 dB Max
Mechanical	
N Interface per	MIL-STD-348B
Operating Temperature	-55°C to +85°C
Materials	
Body(Connector)	Passivated Stainless Steel
Contacts	BeCu
Contact Plating	Au 50µ" Min
Dielectric	PTFE
ROHS Compliant	



Attenuation Accuracy (Typical)	
0-2.7 Ghz	±.50 dB or 3%

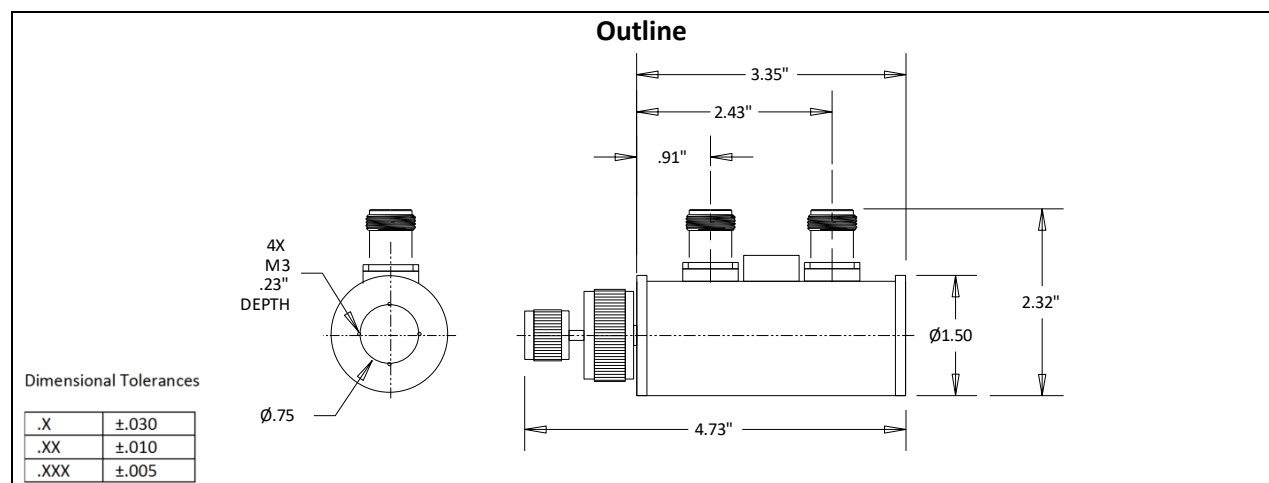

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com