




CRF086 RG405 Formable Equivalent

Rev 000

Electrical	
Impedance	50 Ohms
Velocity of Propagation	70%
Shield Effectiveness(> dB)	100
Mechanical	
Operating Temperature	-55°C to +125°C
Bend Radius(Install)	0.25" Min
Bend Radius(Repeated)	0.80" Min
Construction	
1. Inner Conductor	Silver Plated Copper Clad Steel
2. Dielectric	PTFE
3. Outer Conductor 2	Tin Soaked Copper Braid
4. Jacket	FEP
ROHS Compliant	

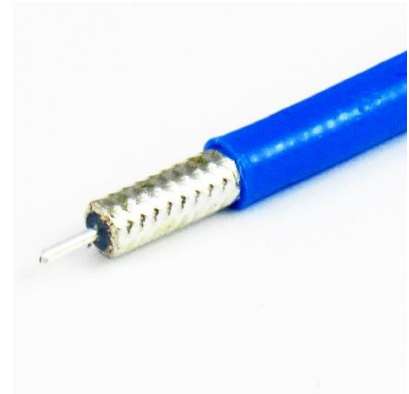

Frequency(Ghz)	0.5	1	5	10	20
Attenuation dB/100 ft	15.84	22.55	55.16	81.08	120.40

