




CRF141MF RG402 Flexible Equivalent

Rev 000

Electrical	
Impedance	50 Ohms
Velocity of Propagation	70%
Shield Effectiveness(> dB)	100
Mechanical	
Operating Temperature	-65°C to +200°C
Bend Radius(Install)	0.75" Min
Bend Radius(Repeated)	2.00" Min
Construction	
1. Inner Conductor	Silver Plated Copper Clad Steel
2. Dielectric	PTFE
3. Outer Conductor 1	Flat Silver Plated Copper Wrap
4. Outer Conductor 2	Silver Plated Copper Braid
5. Jacket	FEP
ROHS Compliant	



Frequency(Ghz)	1	2	5	8	10	12.5	18
Attenuation dB/100 ft	13.72	19.81	32.61	42.98	50.90	58.83	74.68

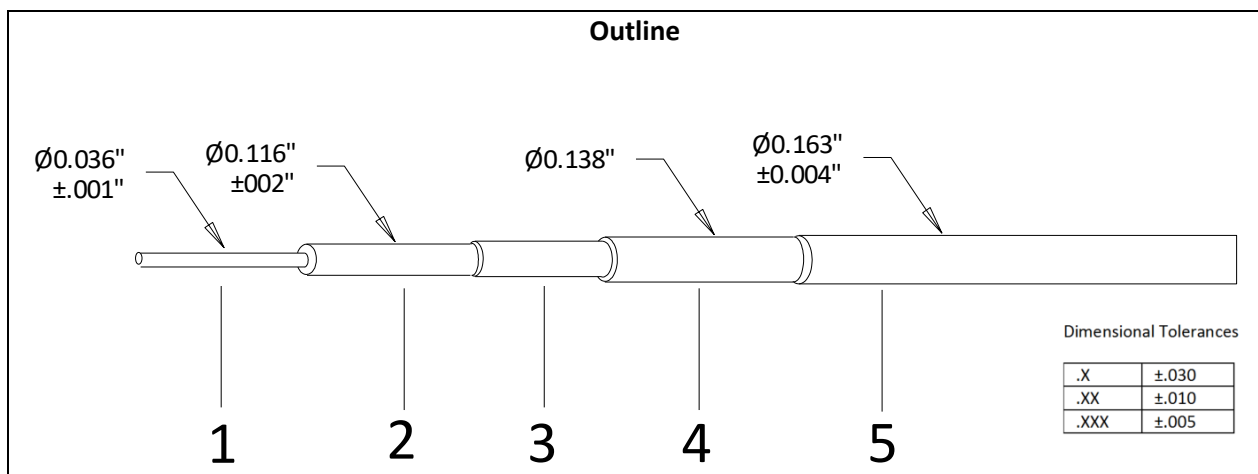

1130 Junction Dr. Suite 100. Allen, TX 75013 800-399-6891 www.CentricRF.com